

SB: **Wall - mounted hose boxes**


Article : **8022, 8023, 8024, 8025**



Reason: **Improvement of the tightness**

Solution: To avoid a leakage on the water pass (12) the o-ring 28,5x2,62 (13) will be replaced by a new one.
This new o-rings are implemented in the production with index J514 (8022) and B532 (8023, 8024, 8025) .

In cases of repairs we recommend to use only the new o-rings !

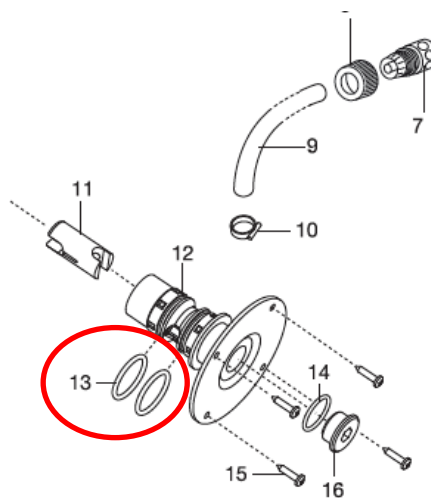

New spare part: O-Ring 29,5x2,7 08022-00.600.46