


customer.services@husqvarna.co.uk

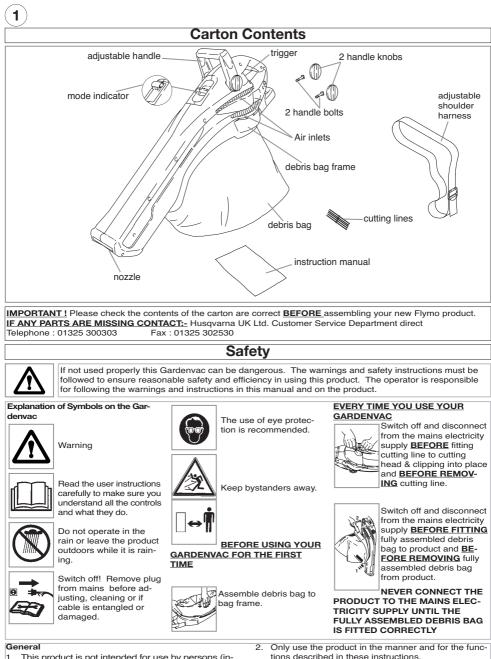

- 1. This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning the use of the product by a person responsible for their safety. Children should be supervised to ensure that they do not play with the product. Local regulations may restrict the age of the operator.
- tions described in these instructions.
- 3. Never operate the product when you are tired, ill or under the influence of alcohol, drugs or medicine.
- 4. The operator or user is responsible for accidents or hazards occurring to other people or their property. Electrical
- The British Standards Institute recommend the use 1 of a Residual Current Device (R.C.D.) with a tripping current of not more than 30mA. Even with a R.C.D.

installed 100% safety cannot be guaranteed and safe working practice must be followed at all times. Check your R.C.D. every time you use it.

- 2. Before use, examine cable for damage, replace it if there are signs of damage or ageing.
- 3. Do not use the product if the electric cables are damaged or worn.
- 4. Immediately disconnect from the mains electricity supply if the cable is cut, or the insulation is damaged. Do not touch the electric cable until the electrical supply has been disconnected. Do not repair a cut or damaged cable. Replace it with a new one.
- 5. Your electric cable must be uncoiled, coiled cables can overheat and reduce the efficiency of the product.
- 6. Do not pull cable around sharp objects.
- Always switch off at the mains before disconnecting any plug, cable connector or extension cable.
- Switch off, remove plug from mains and examine electric supply cable for damage or ageing <u>before</u> winding cable for storage. Do not repair a damaged cable, replace it with a new one. Use only genuine replacement cable.
- 9. Never carry the product by the cable.
- 10. Never pull on the cable to disconnect any of the plugs
- 11. Always wind cable carefully, avoiding kinking.
- 12. Use only on AC mains supply voltage shown on the product rating label.
- Our products are double insulated to EN60335. Under no circumstance should an earth be connected to any part of the product.

Preparation

- 1. Always wear suitable clothing, gloves, and stout shoes.
- 2. The use of eye protection is recommended.
- The use of ear protection is recommended.
- 4. To prevent dust irritation, the wearing of a face mask is recommended.
- 5. Do not wear loose clothing or jewellery that can be drawn into the air inlet.
- Do not wear clothing with attachments, i.e. toggles or drawstrings that can be drawn into the air inlet.
- Inspect your product before each use, especially the parts of the cutting head. Replace cutting line if worn or damaged.
- Do not use if any part is damaged or broken or if any of the screws are loose. Have it repaired by an authorised repairer.

CABLES

- IMPORTANT
- Use only 1.00mm² size cable up to 40 metres length maximum.

Maximum rating :

- 1.00mm² size cable, 10 amps 250 volts AC.
- THE GARDENVAC IS SUPPLIED WITH CABLE WIRED DIRECTLY INTO THE PRODUCT.
- Flymo Mains Cables and Extension Cables are available from your local Husqvarna UK Ltd., Approved Service Centre.
- Do not wire an extension cable directly to your product yourself. Please contact your local Husqvarna UK Ltd. Approved Service Centre for further information on the connectors and kits available.
- 3. Only use extension cables specifically designed for outdoor use.

CONNECTORS

IMPORTANT

- Flymo connectors are suitable for use with 2 core cable only. Under no circumstances should these connectors be used for earthed products.
- All Flymo connectors and cables are of splashproof construction. They are not waterproof and must not be left outside permanently nor should they be submerged or immersed in water. Do not let cable lay or trail through pools of water or splashed with water from hose pipes.

MAINS PLUG REPLACEMENT

IMPORTANT

If the plug supplied is cut off it should be destroyed.

9. Always check your product is in a safe operating condition before use.

Use

- 1. Use the product only in daylight or good artificial light.
- 2. Do not use the product when it is raining or in damp
- and wet areas. 3. Never use the product in or near water or ponds.
- Never use the product in or near water or ponds.
- Know how to stop the product quickly in an emergency.
 On slopes, be extra careful of your footing and wear non-slip footwear.
- 6. Never pick up or carry the product by the cable.
- 7. Keep children, pets and bystanders at a safe distance when using your product.
- 8. Keep long hair away from air inlet.
- 9. Keep all inlets clear of debris.
- 10. Always remain alert.
- 11. Do not attempt to use your product without the fully assembled debris bag fitted.
- 12. Never blow debris in the direction of bystanders.
- 13. Do not overreach. Keep proper footing and balance at all times.
- 14. The cutting head and cutting line continue to rotate after your product has been switched off.
- 15. Remove the plug from the mains :-
- before removing or replacing cutting line;
- before removing or replacing fully assembled debris bag;
- before leaving the product unattended for any period;
- before clearing a blockage;
- before checking, cleaning or working on the appliance;
- if the product starts to vibrate abnormally. Check im-
- mediately. Excessive vibration can cause injury.

Maintenance and storage

- 1. Keep all nuts, bolts and screws tight to be sure the product is in a safe working condition.
- 2. Replace worn or damaged parts for safety.
- 3. After use the product should be stored in a safe place where it is protected from damage.
- 4. Inspect the collection bag regularly. If the collection bag becomes worn or damaged, replace.
- 5. Store in a cool, dry place and out of reach of children. Do not store outdoors.

There is an electric shock hazard if a cut off plug is inserted into a 13 amp socket.

- No earth required. Flymo products are double insulated to EN60335 and under no circumstances should an earth be connected to any part of the product.
- 2. Ensure the mains voltage suits your product

3. IMPORTANT!

The wires in the mains lead are coloured in accordance with the following code:

BLUE - NEUTRAL BROWN - LIVE

The wire which is coloured BLUE must be connected to the Terminal which is marked with the letter 'N' or coloured BLACK.


The wire which is coloured BROWN must be connected to the Terminal which is marked with the letter 'L' or coloured RED.

- 4. It is important that the outer sheath is clamped correctly into the 3-pin plug.
- If in doubt consult your local Service Repairer or qualified electrician before the machine is used.
- 6. A 13 Amp fuse must be fitted to the Mains Plug.
- The normal plug fuse and household fuse only protect the electrical equipment and are not a safeguard against electrocution.

If your product is hard wired i.e. non-detachable mains electric cable, a conversion kit and extension cable is available from all Husqvarna UK Ltd. Approved Service Centres which can be found in your local Yellow Pages.

2


Assembly Instructions



To Attach Debris Bag to Bag Frame With bag frame on the ground:-

3

- Fit first two holes on the plastic trim of the debris bag to the first two location points on the front of the bag frame (where debris fin is attached). (A)
- 2. Fit next hole on the plastic trim to next location point on bag frame. (B)
- 3. ...until all holes on the plastic trim of the debris bag are securely located to bag frame. (C)
- ENSURE THE DEBRIS BAG IS FITTED SE-CURELY TO THE BAG FRAME.

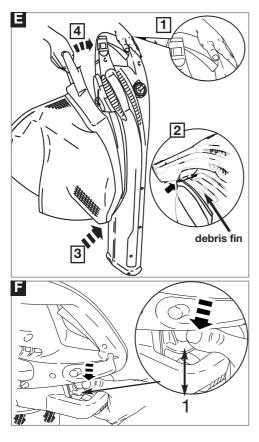



To Fit the Cutting Line to the Cutting Head (D)

- Switch off and disconnect from the mains electricity supply <u>BEFORE</u> removing or fitting the cutting line.
- Handle the cutting line with care sharp edges can cause injury.
- 1. Place the cutting line into the slot in the cutting head and click into place as illustrated in **Figure D**.
- Ensure the cutting line is correctly located.
- ONLY USE CUTTING LINE SPECIFIED FOR THIS PRODUCT. SEE PRODUCT RATING LABEL FOR MODEL DETAILS

To Fit Assembled Debris Bag To Product (E)

- Switch off and disconnect from the mains electricity supply <u>BEFORE REMOVING OR</u> <u>REPLACING</u> the fully assembled debris bag.
- The cutting head and cutting line continue to rotate after your Gardenvac has been switched off.


IMPORTANT: Do not squeeze the trigger when fitting the debris bag (E1)

- 1. Ensure debris fin is horizontal (E2) as illustrated in fig E.
- Locate bag frame into clip on the underside of product. (E3).
- 3. Lift handle towards product until bag latch locates and click into place. **(E4)**

To Remove Debris Bag From Product (F)

- 1. Gently press bag latch (F1) down. See fig F.
- 2. Lower handle of bag frame away from product.
- 3. Move bag frame forward.

Assembly instructions



Fitting the Handle Bolt (G)


- 1. Place handle bolt into the location slot on the product and slide into place.**(G)**.
- 2. Repeat on the other side.

Fitting the Handle (H)

- 1. Locate handle onto handle bolts on each side of the product.
- 2. Secure handle by turning handle knobs clockwise. (H)
- The handle can be adjusted by turning handle knobs 3 full turns anti-clockwise, moving handle to position required and re-securing handle as described in 2.

Fitting The Shoulder Harness (J) & (K).

- 1. Thread strap through the slots in the handle.(J)
- Thread strap through the buckle. See fig J. Adjust as required to ensure the shoulder harness is in the most comfortable position. See fig. K.



WARNING

L

The use of eye protection is recommended. The use of ear protection is recommended. To prevent dust irritation, the wearing of a face-mask is recommended. Never point your product at bystanders. Do not use your product in the rain. Do not leave your product outdoors while it is raining. IMPORTANTI: YOUR PRODUCT WILL NOT OPERATE UNTIL THE FULLY ASSEMBLED DEBRIS BAG AND FRAME ARE PROPERLY FITTED.

BEFORE USE: ENSURE THERE ARE NO GAPS BETWEEN THE DEBRIS BAG AND THE PRODUCT.

- The Gardenvac has 3 modes of operation.
- These can be selected by moving the mode indicator to adjust the nozzle position for blow, vacuum or jet vacuum mode.
- In vacuum and jet vacuum modes the product will shred leaves etc.


BLOW

- Position 1 Blow Mode The Gardenvac will blow debris from pa-
- tios, paths, driveways, lawns, bushes, borders etc.

Using As A Blower

- 1. Select position 1 on the mode indicator. See fig L.
- 2. Point nozzle towards the ground.
- 3. To start squeeze trigger.
- 4. Stand back from debris to be cleared.
- 5. Point nozzle towards the debris and slowly approach.
- 6. To stop release trigger.

VACUUM



Position 2 - Vacuum Mode

In this position your product will pick up leaves, paper, rubbish, cans etc. <u>IMPORTANT: REMOVE NYLON LINE BEFORE VACUUMING CANS</u> Using As A Vacuum

- 1. Select position 2 on the mode indicator. See fig M.
- 2. Position nozzle slightly above the debris, squeeze the trigger and move slowly back and forth.
- 3. Do not force the nozzle into the debris as this will impair performance.
 - To stop release the trigger.



Fails To Operate

- 1. Is the power turned on?
- 2. Is the fully assembled debris bag correctly fitted to the product?
- 3. Check the fuse in the plug, if blown replace.
- Fuse continues to blow? Immediately disconnect from the mains electricity supply and consult your local Service Centre/Dealer/Distributor

Poor Blowing

- 1. The air inlets are blocked, clean all air inlets.
- 2. Mode indicator not in the right position?
- 3. If poor blowing persists? Immediately disconnect from the mains electricity supply and consult your local Service Centre/Dealer/Distributor

Poor Vacuum/Jet Vacuum

- 1. The air inlets are blocked, clean all air inlets.
- 2. Mode indicator not in the right position?
- 3. If poor vacuuming persists?
 - Immediately disconnect from the mains electricity supply and consult your local Service Centre/Dealer/Distributor

Excessive Vibration

- 1. The cutting line is damaged replace with new cutting line.
- 2. Ensure the fully assembled debris bag is correctly fitted to the product.
- 3. If excessive vibration persists? Immediately disconnect from the mains electricity supply and consult your local Service Centre/Dealer/Distributor

Poor Shredding

- 1. The cutting line is damaged replace with new cutting line.
- TO PROLONG CUTTING LINE LIFE
 The Gardenvac has been designed to shred leaves. If collecting large amounts of any other debris - remove the cutting line.

 If poor shredding persists?
 - Immediately disconnect from the mains electricity supply and consult your local Service Centre/Dealer/Distributor

Service Recommendations

- 1. We strongly recommend that your product is serviced at least every twelve months, more often in a professional application.
- 2. Always use genuine Flymo Spare Parts.
- 3. Prepacked spares are available from most Husqvarna UK Ltd. stockists.
- 4. Your product is uniquely identified by a silver and black product rating label
- If you have a problem with your machine contact your local Approved Service Centre ensuring you have full details of your product as described on the product rating label.
- Should it be necessary for work to be carried out by your Service Centre, it is important to take your complete machine including cable and any extension cables used.

A network of specialist dealers can be found in your local Yellow Pages. To obtain service on your Flymo product simply telephone or visit your local Service Centre. Should you require service under the terms of our guarantee the Service Centre will require proof of purchase.

All of the centres listed stock genuine Flymo Spare Parts.

NOTE: Our Service Repairers act on their own behalf and are not empowered to commit or legally bind Husqvarna UK Ltd. in any manner whatsoever.

Environmental Information

Husqvarna UK Ltd. are manufactured under an Environmental Management System (ISO 14001) using, where practical, components manufactured in the most environmentally responsible manner, according to company procedures, and with the potential for recycling at the end of the products' life.

- Packaging is recyclable and plastic components have been labelled (where practical) for categorised recycling.
- · Awareness of the environment must be considered when disposing of 'end-of-life' product.
- If necessary, contact your local authority for disposal information.

The symbol 🔏 on the product or on its packaging indicates that this product may not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment.

By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product.

For more detailed information about recycling of this product, please contact your local council office, your household waste disposal service or the shop where you purchased the product.

Guarantee & Guarantee Policy

If any part is found to be defective due to faulty manufacture within the guarantee period, Husqvarna UK Ltd., through its Authorised Service Repairers will effect the repair or replacement to the customer free of charge providing:

- The fault is reported directly to the Authorised Repairer. (a) (b) Proof of purchase is provided.
- (c) The fault is not caused by misuse, neglect or faulty adjustment by the user.
- (d) The failure has not occurred through fair wear and tear.
- (e) The machine has not been serviced or repaired, taken apart or tampered with by any person not authorised by Husovarna UK I td
- The machine has not been used for hire. (f)
- The machine is owned by the original purchaser. (q)
- The machine has not been used commercially. (h) This guarantee is additional to, and in no way diminishes the customers statutory rights.

Failures due to the following are not covered, therefore it is important that you read the instructions contained in this Operator's Manual and understand how to operate and maintain your machine:

- Failures not covered by guarantee
- Replacing Cutting Line.
- Failures as a result of not reporting an initial fault.
- Failures as a result of sudden impact.
- Failures as a result of not using the product in accordance with the instructions and recommendations contained in this Operator's Manual.
- Machines used for hire are not covered by this guarantee.
- The following items listed are considered as wearing parts and their life is dependent on regular maintenance and are, therefore not normally subject to a valid warranty claim: Cutting Line, Electric Mains cable, Debris Bag.
- Caution!

Husqvarna UK Ltd. does not accept liability under the warranty for defects caused in whole or part, directly or indirectly by the fitting of replacement parts or additional parts that are not either manufactured or approved by Husqvarna UK Ltd., or by the machine having been modified in any way

EC Declaration of Conformity

Husqvarna UK Ltd., Aycliffe Industrial Park

Newton Aycliffe, Co. Durham, DL5 6UP, England

	ingrand
Declare under our sole responsibility that	he product(s);
CategoryElectri Model(s)MEV16 Identification of Series.See Pr Year of Construction.See Pr	00, MEV2200, MEV2500, MEV2700 oduct Rating Label
98/37/EC (until 31.12.09), 2006/42/EC (1 based on the following EU harmonized sta IEC60335-1, IEC60335-2-100, EN50366,	EN55014-1, EN61000-3-2, EN61000-3-3 level L_{pA} at the operator's position, recorded on a sample of the above
The maximum hand / arm vibration weight product(s) corresponds to the Value given	ed value measured according to EN ISO 5349 on a sample of the above in the table.
2000/14/EC: The Measured Sound Power figures. Conformity Assessment Procedure	L_{WA} & Guaranteed Sound Power L_{WA} values are according to the tabulated
Notified Body	

Leatherhead, Surrey KT22 7SB, England

Newton Aycliffe, 06/03/2008 M. Bowden, **Research & Development Director** Husqvarna UK Ltd.

F

Туре	MEV1800	MEV2200	MEV2500	MEV2700
Power (kW)	1.8	2.2	2.5	2.7
Measured Sound Power LWA (dB(A))	99	99	99	99
Guaranteed Sound Power LWA (dB(A))	99	99	99	99
Level (dB(A))	87.9	87.9	87.9	87.9
Value (m/s ²)	2.89	2.89	2.89	2.89
Nominal Air Flow m³/s	0.1024	0.1024	0.1024	0.1024
Weight (Kg)	5.1	5.1	5.1	5.1

Husqvarna UK Ltd. Aycliffe Industrial Park NEWTON AYCLIFFE Co.Durham DL5 6UP ENGLAND

Telephone - (00) 44 1325 302302 Fax - (00) 44 1325 310339

Our policy of continuous improvement means that the specification of products may be altered from time to time without prior notice.

